



# Technical informations



Certificato Sistema di Gestione Qualità n° 50 100 2898



Reg. n° 8231-E ISO 14001

## Quadro Line

Code	<b>204-00000000001</b>
Name	Mini compartment locker
Dimensions (WxDxH )	420x500x1800 mm
Inside Dimensions (WxDxH)	418x480x402 mm
Entrance dimensions	330x369 mm
N° places	4
N° places for column	4
Material	DC01/FeP01 UNI EN 10130
Weight (Kg)	31
Volume (m3)	0,37




### General Informations

Base and corpus	Base on steel feet, h. 120 mm. with anti-oxidation plastic inserts,predisposed for the adjustable feet. Reinforced ribs for the base interlocking. Corpus in one bended panel with perforations between roof and back for ventilation and sides front thickness 30 mm. with anticut folded edges on tree levels
Door	Doors fitted with intenal hinges with external pin with 180 ° rotation, reinforce on the hinges side and anticut bend on tree orders on the remaining sides, squared holes for ventilation ,squared handle with label holder.
Lock	Cylinder lock typo Yale with double key.
Closing	One way lever
Inside	empty
Colour door	Painting with epoxy powder color RAL 7035.
Colour corpus	Painting with epoxy powder color RAL 7035.
Law	In specification D.Lgs.81/2008, EN UNI ISO 9001, EN UNI ISO 14001, UNI tests on product and finishing.

### Possibilities

Base	On base, inox feet, without feet.
door	Without ventilation, with grid, HPL or plexiglass.
lock	padlock handle,embedded padlock,mechanic combination ,electronic combination and coin lock (€1,00).
closing	One way lever
Inside	empty

door color

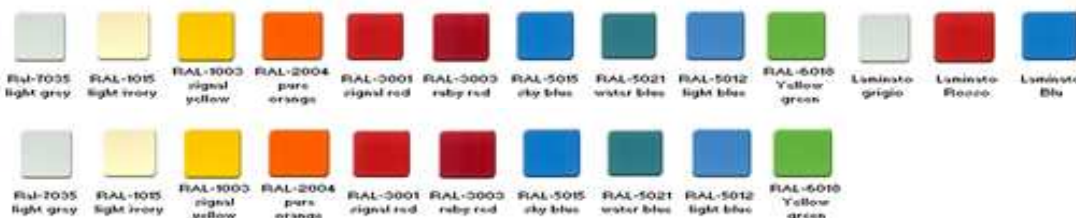

corpus color





## Technical informations



Certificato Sistema di  
Gestione Qualità  
n° 50 100 2898



Reg. n° 8231-E  
ISO 14001

Code **204-00000000001**

### Accessories.

Sloping roof  
Support bench  
2 sides for base  
Frontal base  
Adjustable feet  
Padlock  
Anti-corrosion cover for feet

### Spare parts

Cylinder lock type Yale with double key  
Padlock handle  
Door H. mm. 395

### Certifications

UNI 8596:2005 Stability  
UNI 8597:2005 Structure resistance  
UNI 8603:2005 Shelves supports resistance  
UNI 9081:2005 Resistance of the doors to vertical cargo  
UNI 8606:2005 Cargo total maximum  
UNI 8600:2005 Bending with concentrated cargo  
UNI 8601:1984 Bending of shelves  
UNI 9115/87 Erosion Taber  
UNI 9428/89 Resistance to scratches  
UNI 9429/89 Resistance to sudden changes in temperature  
UNI 9300/88 e FA 276/89 Tendency to get dirty  
UNI 9427/89 Resistance to light  
UNI 9149/89 Mirror-like reflection  
UNI EN ISO 9227/2006 Resistance to corrosion  
UNI 8901/86 Resistance to slamming  
UNI EN ISO 1520/95 Resistance trials  
UNI 10782/1999 Hardness test- Pencil method  
UNI EN ISO 2409/2007 Grid test

**These data are exclusive property of San Polo Lamiere S.p.A. Div. Armet**

Reproduction is forbidden within the law (art.171 Law 22/04/1941 ,n.633).

The fraudulent use, without proper written authorization, even partial and by whatever means, will be protected according to law.

The foregoing text contains information reserved to the intended recipient.

The content of this e-mail is confidential and its confidentiality is legally protected by DL196/03